




BIOGUARD PLAIN

(ISO 5)

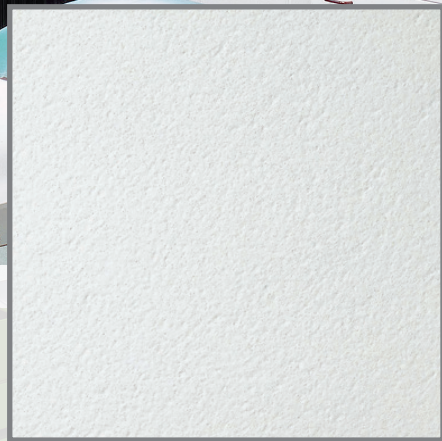

BIOGUARD PLAIN (ISO 5)



43%
EN ISO 14021

Recycled Content

87%
EN ISO 7724-2 & 3

Light Reflectance

Concentration


BIOGUARD	BOARD	TEGULAR	MICROLOOK
	 Prelude XL ² /TLX / CR 24 mm Clean Room Grid 24 mm	 Prelude XL ² /TLX 24 mm Clean Room Grid 24 mm	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm
600 x 600 x 15 mm	2221 M	2223 M	2224 M
625 x 625 x 15 mm	2221 D	2223 D	2224 D
600 x 1200 x 15 mm	2222 M		
625 x 1250 x 15 mm	2222 D		



EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.20(L)	0.20	0.40	0.25	0.15	0.15	0.20	0.30	α_p

Sound Absorption Class = E

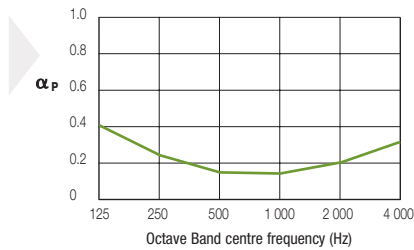

EN 20140-9 & EN ISO 717-1

D_{ncw}	35 dB
------------------------	--------------



EN ISO 140-3 & EN ISO 717-1

R_w	19 dB
----------------------	--------------



EEA	Euroclass A2-s1, d0
EN 13501-1	

RUS	KM1 (G1, V1, D1, T1)
FZ 123	



EN 12667 & ISO 8301

$\lambda = 0.06$ W/m K



ISO 14644-1

ISO 5



95 % RH



15 YEAR guarantee



30 YEAR system guarantee



3.6 - 4.6 kg/m²

Please contact the Armstrong Technical Sales group for further details.

www.armstrong.eu

Armstrong®