

# DUNE SUPREME/DUNE

CI/SfB

(35) Xy  
02/2011



[www.armstrong-ceilings.co.uk](http://www.armstrong-ceilings.co.uk)  
[www.armstrong-ceilings.ie](http://www.armstrong-ceilings.ie)  
[www.armstrong.ru](http://www.armstrong.ru)  
[www.armstrong.com.tr](http://www.armstrong.com.tr)

**Armstrong®**

# DUNE SUPREME/DUNE



DUNE SUPREME/DUNE	BOARD	TEGULAR	MICROLOOK	VECTOR
	 Prelude XL <sup>2</sup> /TLX 24 mm Prelude Sixty <sup>2</sup>	 Prelude XL <sup>2</sup> /TLX 24 mm Prelude Sixty <sup>2</sup>	 Prelude XL <sup>2</sup> /TL 15 mm Interlude XL <sup>2</sup> 15 mm	 Prelude XL <sup>2</sup> 24 mm Prelude Sixty <sup>2</sup> / Prelude XL <sup>2</sup> 24 mm Cross Tee
<b>DUNE</b>			9813 M	3321 M
500 x 500 x 15 mm				
600 x 600 x 19 mm				
1200 x 300 x 15 mm			2020 M	
1200 x 600 x 15 mm		9687 M	2727 M	
<b>DUNE SUPREME</b>				
600 x 600 x 15 mm	2271 M	2273 M	2274 M	
600 x 1200 x 15 mm	2272 M			
<b>DUNE SUPREME Unperforated</b>				
600 x 600 x 15 mm	2276 M	2278 M	2279 M	
600 x 1200 x 15 mm	2277 M			



$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz	$\alpha_p$
• DUNE (Board/Tegular/MicroLook)									
<b>0.55</b>	0.50	0.40	0.40	0.55	0.55	0.50	0.45		$\alpha_p$

Sound Absorption Class = D

• DUNE Vector									
<b>0.65</b>	0.65	0.50	0.55	0.55	0.70	0.70	0.60		$\alpha_p$


Sound Absorption Class = C

• DUNE SUPREME (Board/Tegular/MicroLook)									
<b>0.55</b>	0.50	0.40	0.45	0.55	0.60	0.50	0.45		$\alpha_p$

Sound Absorption Class = D

• DUNE SUPREME Unperforated (Board/Tegular/MicroLook)									
<b>0.15(L)</b>	0.20	0.40	0.30	0.15	0.15	0.15	0.25		$\alpha_p$

Sound Absorption Class = E

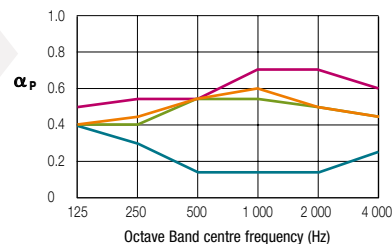

**Dncw 35 dB** (DUNE SUPREME/DUNE and DUNE SUPREME Unperforated)

**Dnfw 35 dB** (DUNE Vector)



**Rw 17 dB** (DUNE SUPREME and DUNE SUPREME Unperforated)

EN ISO 10848-2 / EN 2014069 & EN ISO 717-1

EN ISO 140-3 & EN ISO 717-1



EEA Euroclass A2-s1, d0

RUS KM1 (G1, V1, D1, T1) FZ 123



$\lambda = 0.06 \text{ W/m K}$



99 % RH (DUNE SUPREME)  
95 % RH (DUNE)



LIFE TIME guarantee



≈ 3.9 kg/m<sup>2</sup> (DUNE SUPREME/DUNE)  
≈ 6.2 kg/m<sup>2</sup> (DUNE Vector)

\* Recycled Content: 42% DUNE SUPREME - 41% DUNE Vector - 38% DUNE

\*\* Light Reflectance: 83% DUNE Vector - 84% DUNE SUPREME/DUNE - 85% DUNE SUPREME Unperforated



- Please contact our Internal Technical Sales Group for further details.  
- За более подробной информацией обращайтесь пожалуйста в представительство компании Армстронг.  
- Daha fazla bilgi için lütfen Armstrong temsilcinize danışınız.

[www.armstrong-ceilings.co.uk](http://www.armstrong-ceilings.co.uk)  
[www.armstrong-ceilings.ie](http://www.armstrong-ceilings.ie)  
[www.armstrong.ru](http://www.armstrong.ru)  
[www.armstrong.com.tr](http://www.armstrong.com.tr)

