

VISUAL

[www.armstrong.eu](http://www.armstrong.eu)

**Armstrong**

# VISUAL



70%  
EN ISO  
14021

Recycled Content




Intelligibility


## VISUAL

V49

V64



A/58 mm  
B/15 mm  
C/6.35 mm  
Open area: 45.6 %  
Cut off angle: 18°



A/47.20 mm  
B/15 mm  
C/6.35 mm  
Open area: 39.6 %  
Cut off angle: 22°

MICROLOOK



MICROLOOK



Prelude XL<sup>2</sup>/TL 15 mm



Prelude XL<sup>2</sup>/TL 15 mm



600 x 600 x 19 mm


8580 M

8581 M



EN ISO 354 &  
EN ISO 11654

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz
• V49 + fleece								
<b>0.50(H)</b>	0.50	0.10	0.30	0.40	0.50	0.75	0.90	$\alpha_p$
<b>Sound Absorption Class = D</b>								
• V49 + fleece + 25 mm x 20 kg/m <sup>3</sup> fibreglass overlay								
<b>0.95</b>	0.90	0.35	0.80	0.95	0.90	1.00	1.00	$\alpha_p$
<b>Sound Absorption Class = A</b>								

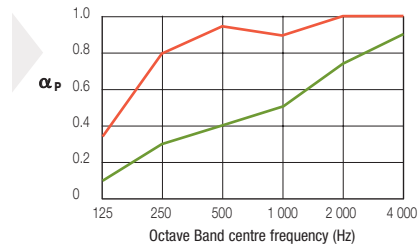

EEA Euroclass A2-s1, d0 (without overlay)  
EN 13501-1

RUS KM1 (G1, V1, D1, T1)  
FZ 123



70 % RH



≈ 4 kg/m<sup>2</sup>

Please contact the Armstrong Technical Sales group for further details.

[www.armstrong.eu](http://www.armstrong.eu)

**Armstrong®**