

HOPITAL DE JOUR

CORTEGA



Recycled Content



Light Reflectance




Intelligibility

CORTEGA

BOARD




Prelude XL²/TLX 24 mm



TEGULAR



Prelude XL²/TLX 24 mm



600 x 600 x 15 mm
600 x 1200 x 15 mm

0770 M
0769 M


0704 M



EN ISO 354 &
EN ISO 11654

| α_w | NRC | 125 | 250 | 500 | 1000 | 2000 | 4000 | Hz |
|----------------|------|------|------|------|------|------|------|------------|
| 0.55(H) | 0.55 | 0.30 | 0.35 | 0.50 | 0.65 | 0.70 | 0.80 | α_p |

Sound Absorption Class = D

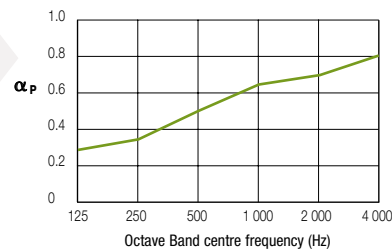

EN ISO 10848-2
/ EN 20140-9
& EN ISO 717-1

| | |
|--------------|--|
| Dncw | |
| 34 dB | |



EN 13501-1

| | |
|-----|---------------------|
| EEA | Euroclass A2-s1, d0 |
| CH | 6q3 (TA VKF) |
| N | In 1 (NBK 14) |

| | |
|-----|---|
| RUS | Hard combustible (G-1): GOST 30244-94; V1, D1, T1 NPB 244-97 |
| UA | Hard combustible (4.3 GOST 12.1.044.89) |



EN 12667
& ISO 8301

$\lambda = 0.052 - 0.057 \text{ W/m K}$



70 % RH



$\approx 3.5 \text{ kg/m}^2$

- Please contact our Internal Technical Sales Group for further details.
- Pour de plus amples informations merci de contacter notre Service Information Plafonds.
- Weitere Informationen erhalten Sie von unserem Kundenservice. Änderungen vorbehalten.
- Voor meer informatie kunt u contact opnemen met Market Service Center.
- Per ulteriori dettagli consultare il nostro Ufficio Commerciale.
- Para más detalles, por favor, contacte con el Servicio de Información de Techos.
- W razie dodatkowych pytań prosimy kontaktować się z biurem Armstrong w Warszawie.

www.armstrong.eu

Armstrong®